




Stock Controls

S20-D3C: Hot Runner Control Card

- Automatic Manual Operation Advanced Anti-Arcing Circuitry Hot Runner Mainframes
- Automatic Soft Start
- Amperage Measurement Display
- Type J or K Thermocouple/ F or C Control
- Selectable Control Methods-Adaptive auto tuning PID or Fuzzy Logic
- Manual Control for Non-tc Applications

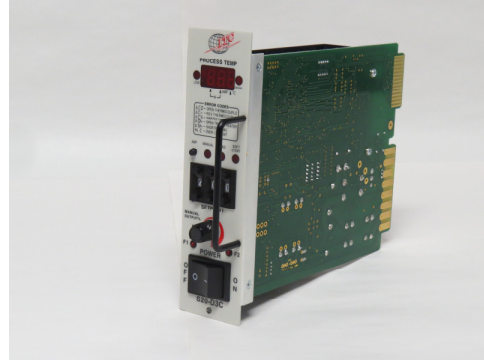

EZ Zone PM Control

- Integrated PID and Limit Controller Options
- High amperage Power Control Output Drives 15 amp Heater Load
- Touch Safe Package
- Type J or K Thermocouple/ F or C Control
- Programmable Menu System
- Bluetooth Programming
- 1/32 And 1/16 Din Stock Options



MFH-1-120V: Single Zone Mold Control 120V

- 208 to 240Vac, Single Phase 120Vac (Optional)
- 15 Amp Capable
- 3600 Watts
- Size: 6 1/2" Wide, 2" High, 10" Deep
- Set Point Range – 0° to 999° F
- Control Accuracy – +/- 1° F (0.5° C)
- Calibration Accuracy – Better Than 0.2% Full Range



Call for pricing and additional Control Options!!