




Stock Process Air Heaters


Features:

- Exit air to 1000° F. At 10 CFM
- 1/2 in. dia. s.s sheath
- Max. 10 CFM Min. 5 .5CFM
- Pressure rating 80 PSIG
- Use dry, clean air
- **DO NOT OPERATE WITHOUT AIR FLOW**

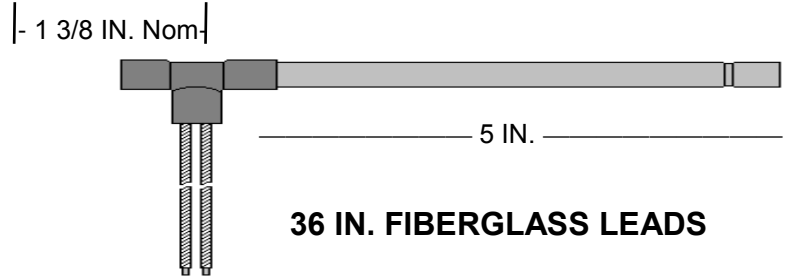


AIR HEATERS

Part Numbers	Volts	Watts	Lead Type	Inlet	Outlet
PA024	120	600	QD	STD	STD
PA024-L36	120	600	36"FG	STD	STD
PA036	120	400	QD	STD	STD
PA036-L	120	400	36"FG	STD	STD
PA036TI	120	400	QD	3/8"NPT	STD
PA036LTI	120	400	36"FG	3/8"NPT	STD
PA036LTITO	120	400	36"FG	3/8"NPT	3/8"NPT
PA036TITO	120	400	QD	3/8"NPT	3/8"NPT
PA139	240	400	QD	STD	STD
PA139L	240	400	36"FG	STD	STD
PA139LTI	240	400	36"FG	3/8"NPT	STD
PA139LTITO	240	400	36"FG	3/8"NPT	3/8"NPT
PA150	240	600	QD	STD	STD
PA150TI	240	600	QD	3/8"NPT	STD

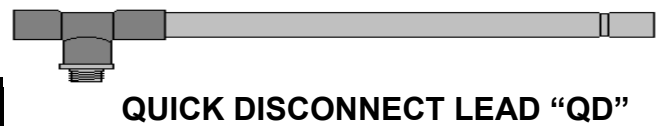


HEATER OPTIONS


3/8" NPT BRASS INLET (TI)



BARBED BRASS INLET



3/8" NPT BRASS OUTLET (TO)



Call for pricing and additional sizes!!

QUICK DISCONNECT CABLES

Part Number	Length	Config.
PARK30-18/5M	5M	Straight
PARR30-18/5M	5M	90°

